




Marathon L2V425 data sheet



Drawing:

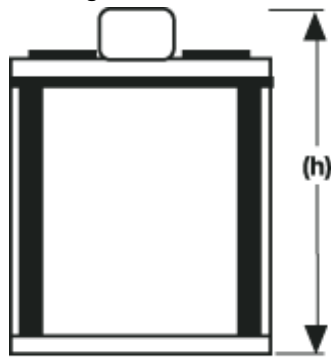

Terminal:



Meets: UL94 HB

Specifications:

Type	Part number	Nom. Voltage	C20 1,80 VpC 20°C Ah	C10 1,80 VpC 20°C Ah	C1 1,60 VpC 20°C Ah	Length mm	Width mm	Height mm	Weight Kg.	Internal resistance acc. IEC896/2 mOhm	Terminal	Pole pairs
L2V425	NALL020425HM0FA	2	456	425	291	208	201	282	28.8	0.3	F-M8	2

Part numbers not valid for North America, use type for ordering!

Constant-current discharge in A (@20°C):

Part number	Type	Volt	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	5h	8h	10h	20h
NALL020425HM0FA	L2V425	1.95	420.0	394.0	344.0	310.0	282.0	236.0	192.0	163.0	107.3	81.1	54.7	37.7	31.2	16.8
NALL020425HM0FA	L2V425	1.90	625.0	578.0	493.0	424.0	372.0	305.0	241.0	201.0	127.0	96.5	64.3	43.8	36.3	19.5
NALL020425HM0FA	L2V425	1.85	840.0	765.0	629.0	540.0	471.0	374.0	289.0	238.0	146.0	109.0	71.7	48.7	40.6	21.8
NALL020425HM0FA	L2V425	1.80	1,025.0	920.0	744.0	622.0	535.0	416.0	317.0	259.0	155.0	115.0	75.0	50.8	42.5	22.8
NALL020425HM0FA	L2V425	1.75	1,200.0	1,065.0	835.0	690.0	590.0	451.0	340.0	274.0	162.0	118.0	76.5	51.8	43.1	23.2
NALL020425HM0FA	L2V425	1.70	1,370.0	1,195.0	915.0	738.0	617.0	468.0	351.0	282.0	166.0	120.0	77.6	52.3	43.5	23.4
NALL020425HM0FA	L2V425	1.65	1,550.0	1,325.0	980.0	775.0	642.0	485.0	360.0	288.0	168.0	122.0	78.4	52.5	43.7	23.5
NALL020425HM0FA	L2V425	1.60	1,700.0	1,430.0	1,020.0	800.0	658.0	494.0	364.0	291.0	169.0	123.0	78.8	52.7	43.8	23.5

Constant-power discharge in W/block (@20°C):

Part number	Type	Volt	3min	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h
NALL020425HM0FA	L2V425	1.90	1,170.0	1,085.0	915.0	795.0	577.0	459.0	388.0	249.0	190.0	128.0	88.0	73.0
NALL020425HM0FA	L2V425	1.85	1,490.0	1,370.0	1,135.0	970.0	685.0	543.0	450.0	282.0	213.0	142.0	96.6	80.5
NALL020425HM0FA	L2V425	1.80	1,750.0	1,585.0	1,305.0	1,100.0	755.0	580.0	478.0	296.0	222.0	147.0	100.0	83.5
NALL020425HM0FA	L2V425	1.75	1,995.0	1,800.0	1,450.0	1,215.0	818.0	620.0	505.0	308.0	227.0	149.0	101.5	84.3
NALL020425HM0FA	L2V425	1.70	2,220.0	1,985.0	1,575.0	1,300.0	850.0	643.0	519.0	311.0	229.0	150.5	102.3	84.7
NALL020425HM0FA	L2V425	1.65	2,380.0	2,115.0	1,640.0	1,335.0	868.0	651.0	527.0	313.0	230.0	152.0	102.8	85.0
NALL020425HM0FA	L2V425	1.60	2,515.0	2,205.0	1,690.0	1,370.0	875.0	657.0	530.0	315.0	231.0	153.0	103.0	85.2